


BOTTLESCREW TOGGLE & TOGGLE


CODE	DIA	LENGTH MIN	LENGTH MAX	A	H	L	TDL KG
SS-3125-06	M6	150	200	7.8	12	90	900
SS-3125-08	M8	185	260	11	17	104	1650
SS-3125-10	M10	260	315	14	20	124	2500
SS-3125-12	M12	260	375	14	25	150	3700
SS-3125-16	M16	325	450	17	25	190	TBA
SS-3125-20	M20	380	515	20	30	212	TBA



STAINLESS STEEL NET CLIP


CODE	WIRE DIA	G	L	L1	L2	L3	a
SS-266	1/8"	M10	19	5	8	3.5	20

This item is for 90 degrees applications only.



ADJUSTABLE STOP

CODE	NOMINAL SIZE	ROPE \emptyset mm	M mm	d1 mm	d2 mm	L mm
SS-2111-034	4	3 & 4	4.3	12	m8	12




PULLEYS FOR CONTINUOUS CABLES

CODE	Suitable for
SS-8240-00	Flat surfaces
SS-8240-50	Round surfaces 50mm Diameter

This item is recommended for interior applications only.



Use Bridco mini fittings for 2.5mm wire for end terminations.

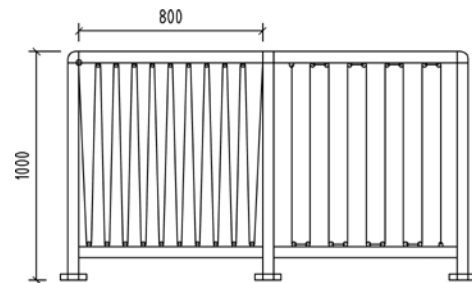

Post Distance	800mm max.
Height	1000mm max.
Pulley Centre	80mm max.
Tension Required	32.3Kg min.
Wire Size	2.5mm
Construction	7 x 7 or 7 x 19